



TEST REPORT

issued by Testing Laboratory

No. 060-055050

**on watertightness of ACO Access Cover UNIFACE, load class N250
according to ČSN EN 1253-4:2016**

Ordering Party: ACO Industries k.s.
Address: 582 22 Přibyslav, Havlíčkova 260, Czech Republic

Company ID: 48119458

Manufacturer: ACO Industries k.s.
Address: 582 22 Přibyslav, Havlíčkova 260, Czech Republic

Test sample: ACO Access Cover UNIFACE 300x300x70, EI120, N250, 1.0037, GS

Order No.: Z060130257

Number of pages of the Test Report incl. title page: 3 Pages of annexes: 1

Prepared by:


Ing. Pavel Juránek, Ph.D.
test technician - specialist

Approved by:


Ing. Martin Zaděláč
head of the Testing Department

Print No.: 1
Number of prints: 2



Brno, 3. 11. 2022

Declaration: 1) The test results in this Report relate only to the tested article and they do not substitute any other documents
2) The Test Report must be copied as a whole only otherwise a written consent of the testing laboratory is needed.

1. Sample data

Evidence number: the test was carried out in the manufacturer's laboratory
 Sample: ACO Access Cover UNIFACE 300x300x70, EI120, N250, 1.0037, GS
 Article number: 447879
 Order / contract: Z060130257
 Date of test conducting: 20.7.2022
 Load class: N250

From the ACO Access Cover UNIFACE FR portfolio with fire resistance was for test performance defined sample ACO Access Cover UNIFACE 300x300x70, EI120, N250, 1.0037, GS.

The test specimens were not tailored before testing. Testing was carried out on the whole product set which consists of cover and its frame. Furthermore, the frame was imbedded into the concrete class C 35/45 to ensure real use conditions (to manufacturer's technical specification).

Technical design of tested subject is given in the Annex 4.1 of this test report.

2. Test methods

ČSN EN 1253-4	Gullies for buildings – Part 4: Access covers, Cl. 7.3.1 Watertightness
Deviations from a standard procedure or the use of non-standardized methods: were not applied.	

Watertightness

The access cover shall be flooded with a (10±1) mm head of water for a period of (15±1) min. The test shall be deemed to have been passed if, during this period, no water has penetrated to the underside.

3. Test results

The test was carried out on: 20.7.2022

The test was performed by: Ing. Pavel Juránek, Ph.D., Zdena Fryčarová

Data on the person who performed the test, test conditions and equipment used are listed in the test minutes. Apparatuses and measuring instruments that used have been certified pursuant to a valid plan of the testing laboratory Brno.

3.1 Watertightness according to the ČSN EN 1253-4, Cl. 7.3.1

ACO Access Cover UNIFACE 300x300x70, EI120, N250, 1.0037, GS		
test no.	test period	test observation
1	15 min.	no water penetration to the underside of cover



3.2 Photo documentation



Figure 1: Watertightness test set up - ACO Access Cover UNIFACE 300x300x70, EI120

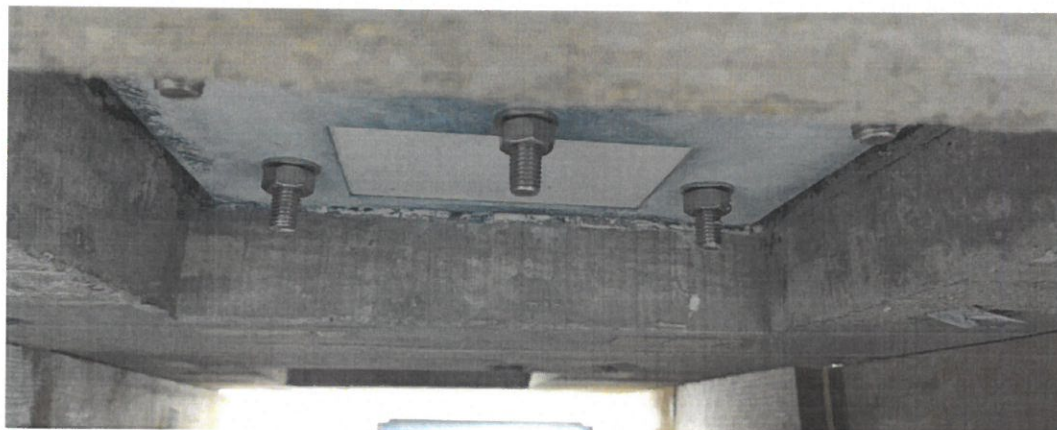


Figure 2: Watertightness test – no water penetration

4. Annexes

4.1 Technical design - ACO Access Cover UNIFACE FR 300x300x70 1.0037, N250

END OF THE TEST REPORT

